


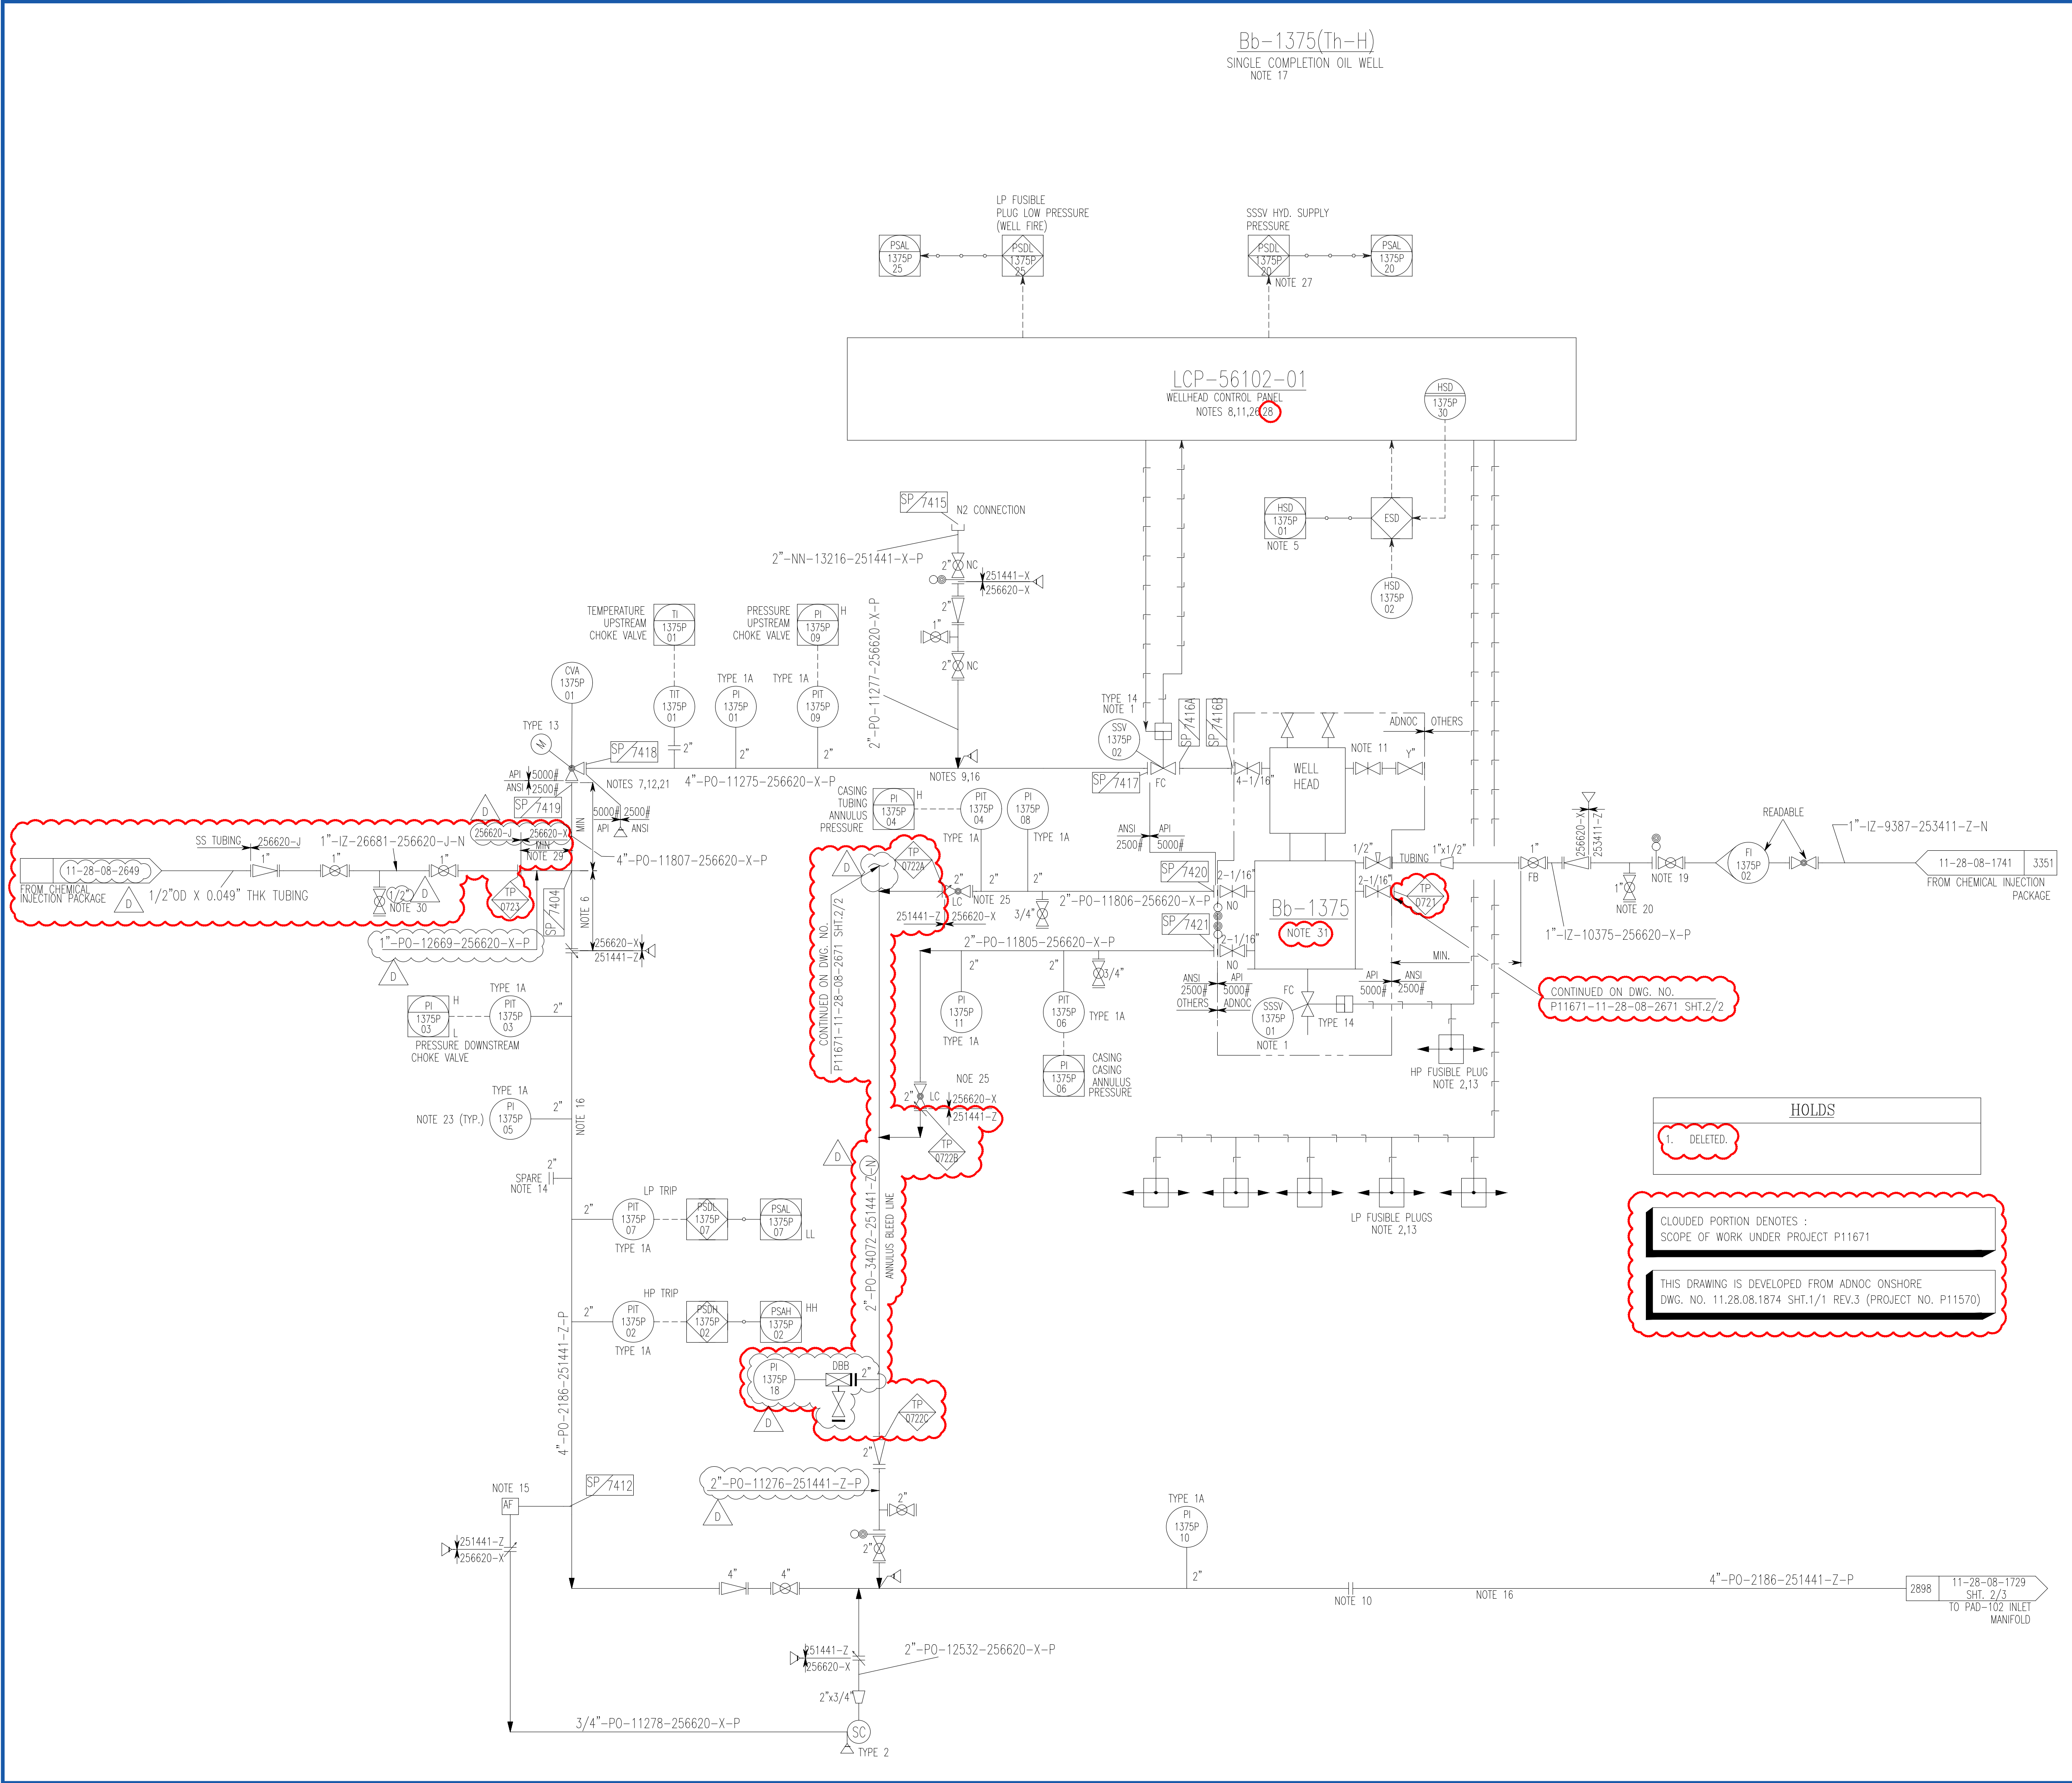

GENERAL NOTES:

G1. FOR SYMBOL, LEGEND AND GENERAL NOTES, REFER PID'S NUMBER 11.01.08.1752 TO 1755.

G2. ALL EQUIPMENT AND INSTRUMENT TAG NUMBERS ON THIS DRAWING ARE PREFIXED BY AREA CODE (11) AND PLANT AREA CODE (28) UNLESS SPECIFIED OTHERWISE.

G3. PIPING SPECIALITY TAG NUMBERS ON THIS DRAWING ARE PREFIXED BY AREA CODE (11) PLANT AREA (28) UNLESS OTHER WISE SPECIFIED.

SPECIFIC NOTES:

1. CLOSURE OF SSSV/SSV TO CAUSE THE CLOSURE OF SDV AT INDIVIDUAL HEAD OF PUMP TO TRIP THAT PARTICULAR HEAD OF CHEMICAL INJECTION PUMPS. CHEMICAL INJECTION PUMPS ARE STARTED REMOTELY FROM BCD'S CONTROL ROOM.

2. HIGH PRESSURE FUSIBLE PLUGS AND LOW PRESSURE FUSIBLE PLUGS PROVIDED TO SHUTDOWN SSSV AND SSV BY MELTING IN CASE OF FIRE AROUND THE WELL. DELETED.

3. PIPING ARRANGEMENT FOR ALL BLEED CONNECTIONS (PROCESS & INSTRUMENT) TERMINATES 1M AWAY FROM THE MANUAL BLEED VALVES ARE OPERATED BY THE OPERATOR.

4. PROVISION FOR REMOTE SHUTDOWN OF WELL FROM BCD'S/RDS/PAD OWS.

5. CRA SPOOL IS PROVIDED UP TO 10 D DOWNSTREAM OF CORROSION INHIBITOR INJECTION POINT.

6. CHOKE VALVE IS REMOTE ADJUSTABLE OPENING FROM CDS.

7. LOCATE PANELS 100m DISTANCE IN THE UPWIND DIRECTION.

8. SPOOL BETWEEN SSV AND CHOKE VALVE IS OF CRA MATERIAL AS PER RELEVANT PIPING MATERIAL CLASS.

9. PROVIDE BREAK FLANGES TO FACILITATE REMOVAL OF PIPING DURING WORKOVER / RIG MOVEMENT UPTO PIPE SLEEPERS.

10. DELETED.

11. LOCAL/REMOTE SOFT SWITCH AT BCD'S FOR LOCAL OPERATION OF CHOKE VALVE FROM WELLHEAD AREA.

12. FUSIBLE PLUGS ARE LOOSE SUPPLIED BY WHCP VENDOR.

13. SPARE CONNECTION FOR FLUSHING OR FUTURE CHEMICAL INJECTION.

14. ACCESS FITTING IS COSASCO OR EQUIVALENT TYPE.

15. TWO PHASE LINE (SLUG FLOW), PROVIDE ADEQUATE SUPPORT. INSTRUMENT IS MOUNTED WITH ADEQUATE SUPPORT.

16. REFER TO THE WELLHEAD TABLE PROVIDED IN P&ID 11.99.08.1933 FOR WELLS ALLOCATION DETAILS.

17. TRANSMITTERS ARE NOT MOUNTED ON FLOW LINE IS MOUNTED SEPARATELY WITH ADEQUATE SUPPORT.

18. ISOLATION VALVE IS LOCATED 100M AWAY FROM WELLHEAD IN UPWIND/CROSSWIND DIRECTION WITHIN WHCP FENCE AREA.

19. TEMPORARY DRUM IS USED FOR DRAINING OF THE CHEMICAL LINE DURING WORK OVER OPERATION.

20. DISTANCE BETWEEN WELL HEAD AND CHOKE VALVE IS AS MINIMUM AS POSSIBLE.

21. DELETED.

22. DELETED.

23. PROVIDE INTEGRAL DOUBLE BLOCK & BLEED VALVES FOR ALL PRESSURE INSTRUMENT CONNECTION.

24. DELETED.

25. CASING TO CASING AND/OR CASING TO TUBING BLEED OFF OPERATION IS MANUAL UNDER OPERATING PROCEDURES. WHEN ANNULUS HIGH PRESSURE IS DETECTED OPERATOR TO ENSURE THAT THERE IS NO FLUID STAGNANCY.

26. FOR WHCP DETAILS REFER VENDOR P&ID 11-28-08-3628.

27. THIS SIGNAL IS USED FOR SSSV CLOSED STATUS.

28. LOCAL CONTROL PANEL SHALL BE PROVIDED AS PART OF BFIP PROJECT P11570 AND P11671 WILL INTEGRATE THE SIGNALS IN SAME PANEL.

29. STANDARD INJECTION NOZZLE AND ACCESS FITTING (COSASCO OR EQUIVALENT FITTING). REFER DETAIL "A" OF LEGEND SHEET 11-99-08-2601.

30. TEMPORARY DRUM SHALL BE USED FOR DRAINING OF THE CHEMICAL LINE DURING WORK OVER OPERATION

31. ADNOC WILL UPDATE THIS WELL TO Y-TYPE CHRISTMAS TREE, AS PER ADNOC STANDARDIZATION PHILOSOPHY.

LEGENDS

P11671 SCOPE CLOUD

REVISION CLOUD

REFERENCE DRAWINGS

TITLE	DRG. No.
LEGEND SHEET	11.01.08.1752 TO 1755
P&ID LEGEND SHEET	P11671-11-99-08-2601
SINGLE COMPLETION ONPAD OIL WELL Bb-1375 (Th-H) WITHOUT HIPPS PAD-102 : BAB (DEMOLITION)	P11671-11-28-08-2672

D	18.07.2025	VP	TL/ST	AJ	ISSUED FOR DESIGN (IFD)
C	09.05.2025	PT	TL/ST	AJ	ISSUED FOR HAZOP (IFH)
B	06.03.2025	VP	TL/ST	AJ	ISSUED FOR DESIGN REVIEW (IDR)
A	31.01.2025	PRA	TL/ST	AJ	ISSUED FOR REVIEW (IFR)
REV.	DATE	DR'N.	CH'D.	AP'D.	DESCRIPTION
SCALE: N.T.S					
LOCATION: BAB/HABSHAN					
PROJECT No. P11671					

CONSULTANT / CONTRACTOR / VENDOR

EPC CONTRACTOR

DRAWING No. AET01342-00-3143072

PROJECT: EPC CALL OUT OF BAB ARTIFICIAL LIFT PHASE-II

DRG. TITLE:

PIPING AND INSTRUMENT DIAGRAM

SINGLE COMPLETION ARTIFICIAL LIFT OIL WELL Bb-1375P

GASLIFT RATING 2500# HIGH H2S PAD 102 : BAB

DRG.No.	1128082671D	1/2
AREA	P/AREA	DOC. CODE
SERIAL No.	REV.	SHT
OF	SHT	SHT