



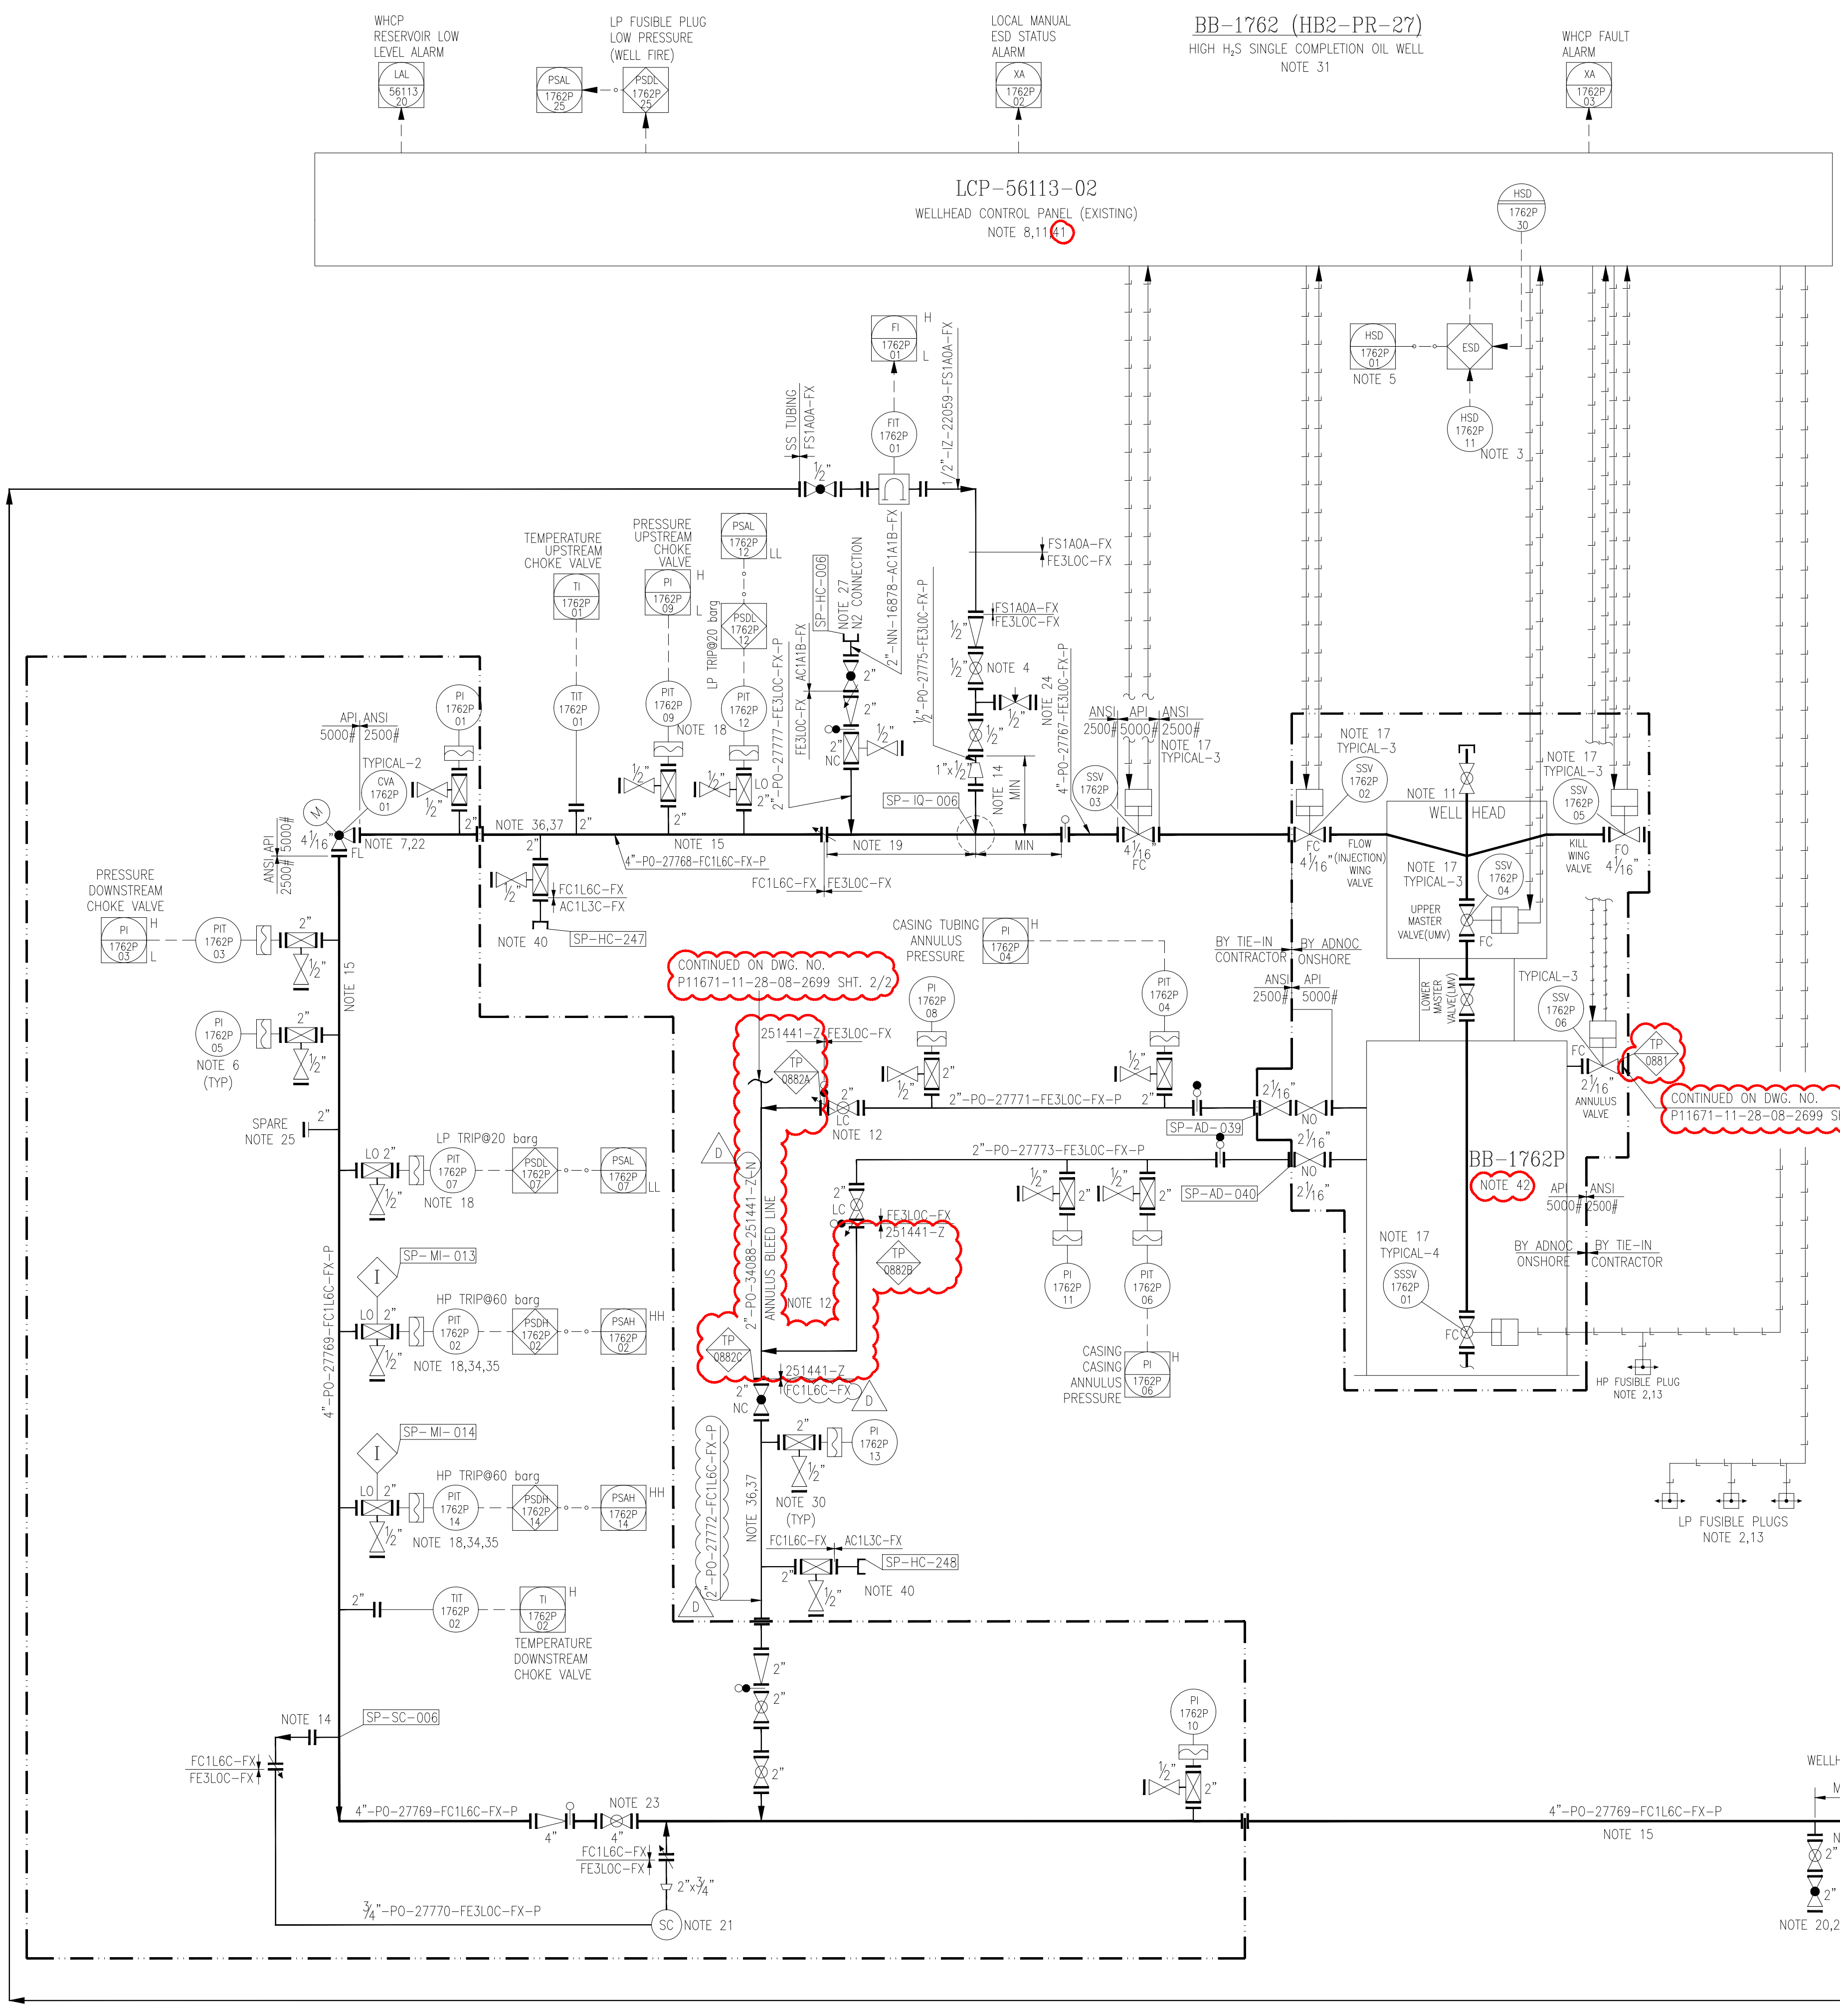

REFERENCE DRAWINGS	
TITLE	DRG. No.
P&ID LEGEND SHEET	P11671-11-99-08-2601
P&ID SINGLE COMPLETION OIL PRODUCER WELL BB-1762 WITH HIPPS ANSI 2500# WELLBAY-113 : BAB (DEMOLITION)	P11671-11-28-08-2700
LEGENDS	
	P11671 CONSTRUCTION SCOPE CLOUD
	REVISION CLOUD
HOLDS	
	1. DELETED.

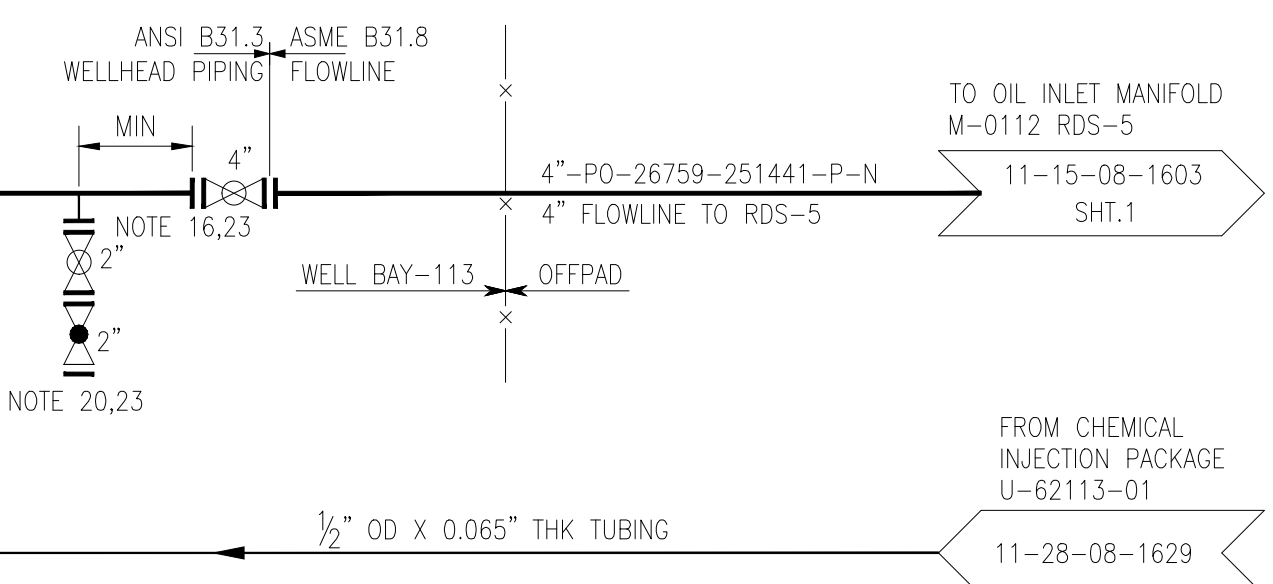

- ### NOTES
- ALL EQUIPMENTS & INSTRUMENTS ON THIS DRAWING SHALL BE PREFIXED WITH AREA CODE (11) BAB AND PLANT AREA CODE (28) UNLESS OTHERWISE SPECIFIED.
 - HIGH PRESSURE FUSIBLE PLUGS AND LOW PRESSURE FUSIBLE PLUGS PROVIDED TO SHUTDOWN SSSV AND SSV BY MELTING IN CASE OF FIRE AROUND THE WELL.
 - THE NUMBER OF ESD PUSH BUTTON AND NUMBER OF H2S DETECTORS TO BE BASED ON FIRE PROTECTION AND FIRE & GAS PHILOSOPHY - BAB FIELD (P30345-11-99-89-1602) AND FIRE AND GAS DETECTION LAYOUT WELL BAY-113 BAB (P30345-11-28-45-1625). MANUAL ESD PUSH BUTTON IS PROVIDED IN WHCP.
 - VALVES SHALL BE LOCATED AS CLOSE AS POSSIBLE TO INJECTION POINT.
 - PROVISION FOR REMOTE SHUTDOWN OF WELL FROM BCDs/RDS CONTROL ROOM.
 - PROVIDE INTEGRAL DOUBLE BLOCK & BLEED VALVES FOR ALL PRESSURE INSTRUMENT CONNECTION.
 - CHOKE VALVE OPENING SHALL BE REMOTELY ADJUSTABLE FROM BCDs/RDS CONTROL ROOM.
 - LOCATE PANELS 100m DISTANCE IN THE UPWIND DIRECTION.
 - DELETED.
 - DELETED.
 - H2S GAS DETECTORS SHALL BE PROVIDED NEAR THE X-MAS TREE AND WELLHEAD CONTROL PANEL AREA COVERING ALL FLANGES, WITH LOCAL AUDIBLE AND VISUAL ALARMS.
 - CASING TO CASING AND/OR CASING TO TUBING BLEED OFF OPERATION IS MANUAL UNDER OPERATING PROCEDURES. WHEN ANNULUS HIGH PRESSURE IS DETECTED, OPERATOR TO ENSURE THAT THERE IS NO FLUID STAGNANCY.
 - FUSIBLE PLUGS ARE LOOSE SUPPLIED BY TIE-IN CONTRACTOR.
 - STANDARD INJECTION NOZZLE AND ACCESS FITTING (COSASCO OR EQUIVALENT FITTING) REFER LEGEND SHEET NO.11-99-08-1601 FOR TYPE & DETAILS.
 - TWO PHASE LINE (SLUG FLOW), PROVIDE ADEQUATE SUPPORT. INSTRUMENT SHALL BE MOUNTED WITH ADEQUATE SUPPORT.
 - ISOLATION VALVE SHALL BE LOCATED 100m AWAY FROM WELLHEAD IN UPWIND/CROSSWIND DIRECTION WITHIN WHCP FENCE AREA.
 - CLOSURE OF SSSV/SSV TO CAUSE THE CLOSURE OF SOV AT INDIVIDUAL HEAD OF PUMP TO TRIP THAT PARTICULAR HEAD OF CHEMICAL INJECTION PUMPS. CHEMICAL INJECTION PUMPS CAN BE STARTED REMOTELY FROM BCDs CONTROL ROOM TO BE CARRIED OUT IN FUTURE.
 - TRIP SET POINT SHALL BE CONFIRMED AS PER RESERVOIR CONDITION.
 - CRA SPOOL SHALL BE PROVIDED UP TO 100 DOWNSTREAM OF CORROSION INHIBITOR INJECTION POINT.
 - TEMPORARY COLLECTION AND RECOVERY PIT OR DRUM SHOULD BE CONSTRUCTED AS AND WHEN THE NEED ARISES.
 - THE SAMPLE CONNECTION IS TYPE A. REFER LEGEND P&ID : 11-99-08-1601 SHEET NO. 8 FOR DETAILS.
 - LOCAL/REMOTE SELECTOR SWITCH SHALL BE PROVIDED ON CHOKE VALVE WHICH ENABLES REMOTE OPEN CLOSE OPERATION FROM BCDs/RDS CONTROL ROOM WHEN REMOTE OPTION IS SELECTED.
 - DOUBLE BLOCK AND BLEED ARRANGEMENT FOR WELL ISOLATION.
 - TEMPORARY DRUM SHALL BE USED FOR DRAINING OF THE CHEMICAL LINE DURING WORK OVER OPERATION.
 - SPARE CONNECTION FOR FLUSHING OR FUTURE CHEMICAL INJECTION.
 - DELETED.
 - PROVISION FOR NITROGEN PURGE CONNECTION.
 - DELETED.
 - REDUCERS ARE PROVIDED ONLY WHEN X-MAS TREE WING VALVE SIZE IS NOT MATCHING WITH THE PIPE SIZE. ACCORDINGLY THE REQUIRED FLANGE, GASKET AND FASTENERS ARE SELECTED.
 - BLEEDS FROM PROCESS AND INSTRUMENT DRAIN SHOULD BE ROUTED TO TERMINATE 1M AWAY FROM THE OPERATOR AND AT THE GROUND LEVEL.
 - THE H2S + CO2 COMPOSITION IS MORE THAN 9MOL%.
 - DELETED.
 - DELETED.
 - A MECHANICAL INTERLOCK SHALL BE PROVIDED WHICH ALLOWS ISOLATION OF ONLY ONE PRESSURE TRANSMITTER AT A TIME.
 - NUMBER OF PRESSURE TRANSMITTER FOR HP TRIP IS 2. THE PTs ARE CERTIFIED FOR SIL2@HFT=0. THE HFT IS RELAXED AS PER IEC 61511. DURING SIL VERIFICATION, PT CONFIGURATION SHALL BE VERIFIED.
 - PERSONNEL PROTECTION IS PROVIDED TO AND WITHIN THE SKID.
 - 25M OF WELL HEAD PIPING DOWNSTREAM OF TEMPERATURE TRANSMITTER AND ANNULUS BLEED LINE AFTER THE PRESSURE GAUGE SHALL BE LAID IN TRENCH WHICH SHALL TERMINATE BEFORE THE CHOKE VALVE.
 - DELETED.
 - DELETED.
 - SOP TO BE FOLLOWED WHILE VACUUM DRAINING.
 - LOCAL CONTROL PANEL SHALL BE PROVIDED AS PART OF O&P PROJECT P30345 AND P11671 WILL INTEGRATE THE SIGNALS IN SAME PANEL.
 - ADNOC WILL UPDATE THIS WELL TO Y-TYPE CHRISTMAS TREE, AS PER ADNOC STANDARDIZATION PHILOSOPHY.

CLOUDED PORTION DENOTES :
SCOPE OF WORK UNDER PROJECT P11671

THIS DRAWING IS DEVELOPED FROM ADNOC ONSHORE
DWG. NO. 11.28.08.1601 SHT.1/1 REV.3 (PROJECT NO. P30345)

REV.	DATE	DR'N.	CH'D.	AP'D.	DESCRIPTION
D	18.07.2025	VP	TL/ST	AJ	ISSUED FOR DESIGN (IFD)
C	09.05.2025	VP	TL/ST	AJ	ISSUED FOR HAZOP (IFH)
B	06.03.2025	VP	TL/ST	AJ	ISSUED FOR DESIGN REVIEW (IDR)
A	11.02.2025	PRA	TL/ST	AJ	ISSUED FOR REVIEW (IFR)

SCALE: N.T.S	LOCATION: BAB/HABSHAN	PROJECT No. P11671
--------------	-----------------------	--------------------

CONSULTANT / CONTRACTOR / VENDOR	EPC CONTRACTOR
DRAWING No. AET01342-00-3143088	
PROJECT: EPC CALL OUT OF BAB ARTIFICIAL LIFT PHASE-II	
DRG. TITLE: PIPING & INSTRUMENT DIAGRAM SINGLE COMPLETION ARTIFICIAL LIFT OIL WELL Bb-1762P GASLIFT RATING 2500# HIGH H2S WELLBAY 113 : BAB	
DRG.No. 1128082699D	1/2
AREA	P/AREA
DOC. CODE	SERIAL No.
REV.	SHT
OF	SHT